


Kimball & Young, Inc.

Lighted Wall Mirror Mounting & Wiring Instructions For Models: 944HW, 909HW, 910HW, 952HW

Kimball & Young recommends using a qualified electrician for all electrical wiring procedures. 110 VAC and electrical box must be installed at the desired location of the wall mirror before continuing. Installation must include ground wire.

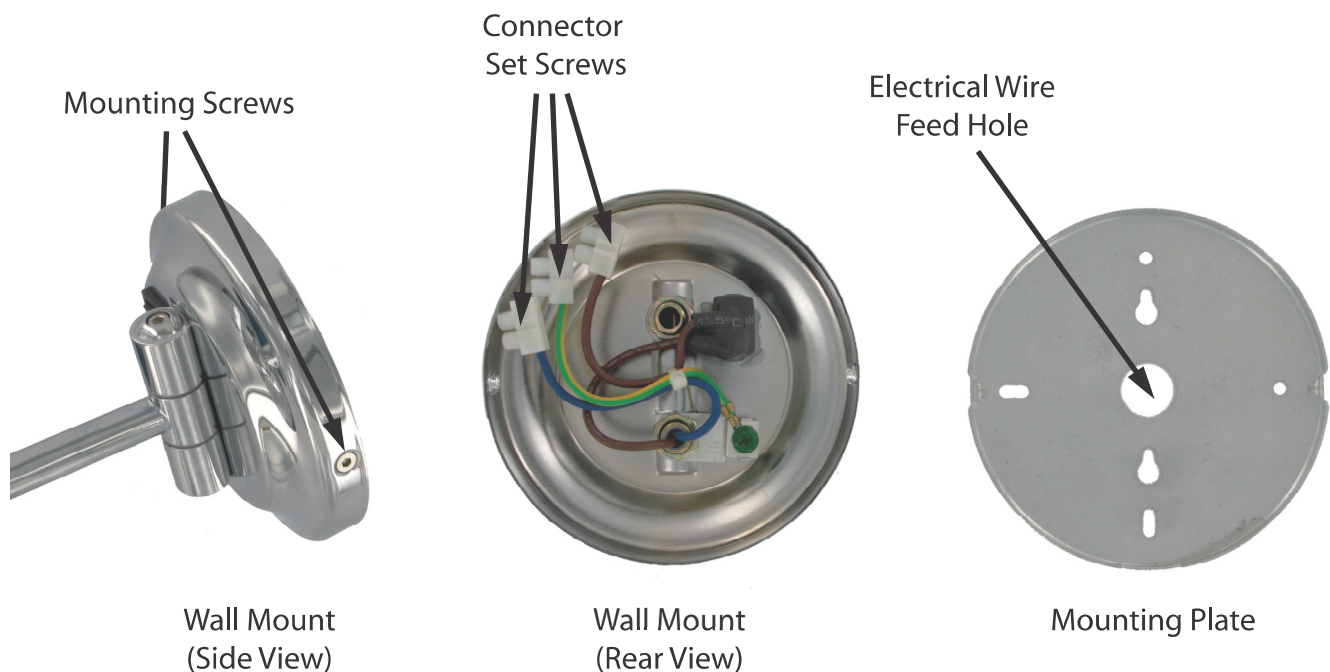

1. Remove the mounting screws on both sides of the mirrors wall mount.
2. Remove the mounting plate from the base.
3. Feed the electrical wire with the ground wire, from the electrical box , through the mounting plate.
4. On the wall mount, connect the white wire to the blue wire connector and the black wire to the brown wire connector and then tighten each set screw.
5. Connect ground wire from wall to the green wire connector and then tighten the set screw.
6. Secure the mounting plate to the electrical box on the wall.
7. Install mirror and wall mount over the wall plate and secure using the two mounting screws.