


All bathtub dimensions are ± 1/2".

## Airbath System II

### Blower must be remotely located

(Diagram is required for custom blower connection locations)

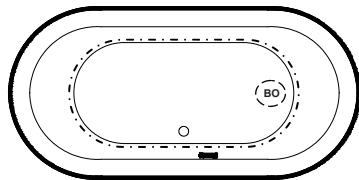

**LEGEND:**



BLOWER OUTLET



REMOTE CONTROL (INVISIBLE MAGNETIC HOLDER)

### STANDARD EQUIPMENT:

- Americh Remote Control (with Airbath System only)
- Integral Waste & Overflow with Polished Chrome trim  
Available with polished brass, polished nickel, satin nickel or oil rubbed bronze trim at no additional charge if specified at the time of

### INSTALLATION TIPS

- Install according to Owner's Manual and local codes.
- Airbath III units may be 1 1/2" - 2 1/2" higher than stated.
- Any whirlpool or Airbath® unit requires an access panel.
- Hot water supply should be 65-75% of tub capacity or greater.
- Always consult your local plumber for recommendations

### DIMENSIONS:

66" x 35" x 25" (1676 x 889 x 635 mm)  
Gallon to Overflow = 70 (Liters = 265)

**MATERIAL:** Acrylic (All Americh Standard Colors)

**TUB FLOOR:** Non-Textured

**UNDERMOUNT:** No

### ELECTRICAL REQUIREMENTS

Americh recommends one 20 amp ground fault circuit interrupter (GFCI) for each power supply provided with the bathtub.

### OPTIONAL ACCESSORIES

- Chromatherapy
- Pillows: 13"

### CODES AND COMPLIANCE

Americh products meet or exceed the following standards:

- Underwriters Laboratories (UL)
- Underwriters Laboratories - Canada (cUL)
- ANSI Z124.1

Contact Americh for additional approvals.