


F701-3



safire vessel lav faucet high

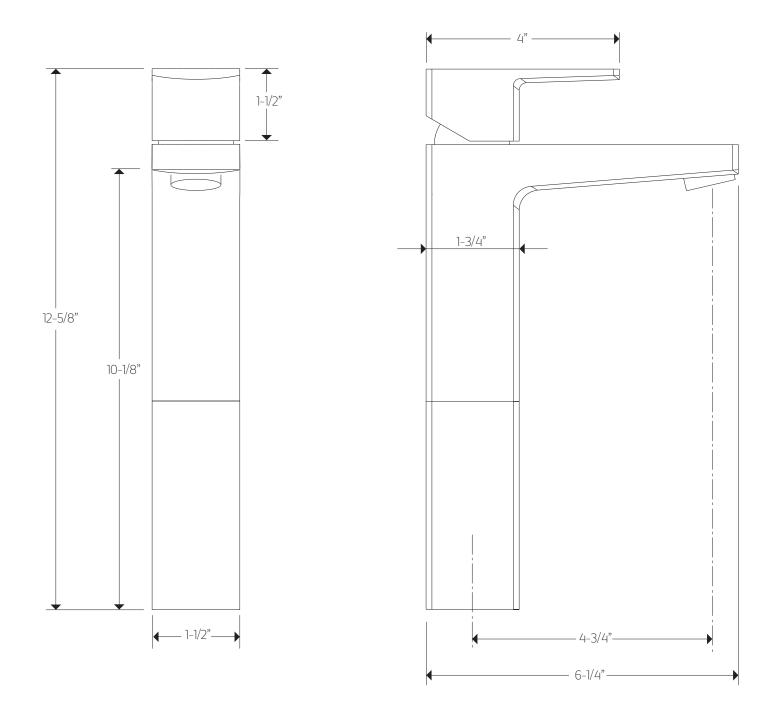

artos®

F701-3

OPERATING SPECIFICATIONS

safire vessel lav faucet high



OPERATING PRESSURE

Minimum: 15 psi Maximum: 75 psi 90psi+ may be necessary to install a pressure reducer

OPERATING TEMPERATURE Maximum: 176°

FLOW RATE 1.2 USGPM

REQUIREMENTS Max Surface Thickness: 1–5/8"

APPROVALS

