

ESSENCIA DESIGN

72" x 36" x 24" (FREESTANDING)

Essencia evokes essence—the elemental aspects of the inner being.


PRODUCT NO.

| MODEL | TMU | TUB |
|--------------|--------------|--------------|
| Freestanding | BESSOFN0T-XX | BESSOFN0N-XX |

| THERMOMASSEUR (TMU) Hydro-thermo massage • Air jet system | \$10,535 |
|--|----------|
| Jets | 46 |
| 1 heated backrest | Included |
| MiaPlus® Control* (not installed) | Included |
| BU-Touch Control Application | Included |
| Geysair® | Included |
| AromaCloud® | N/A |
| AromaFlow*** BAROMAF NEW | \$950 |
| Illuzio Chromatherapy BCHRO6 | \$925 |

| TUB Soaker | \$7,660 |
|--|-----------------------|
| AromaCloud® | N/A |
| AromaFlow*** BAROMAF NEW | \$950 |
| Illuzio Chromatherapy BCHRO6 | \$925 |
| WarmTouchShell® BWTS | \$1,125 |
| DOT control | Included with therapy |

FEATURES

| | |
|---|----------------------|
| Installation type | Freestanding |
| No. of bathers | 46 |
| US gallons | 55 |
| INTEGRATED WASTE & OVERFLOW BOVERINI-XX | |
| White 01 , Chrome 07 , Brushed Nickel 09 , Polished Nickel 10 , Matte White with UltraVelour finish 32 | Installed & Included |
| STANDARD COLOR | |
|  White 01 | Included |

Essencia Design 7236 with Illuzio Chromatherapy

OPTIONS (UPCHARGE APPLICABLE)

COLOR

| | |
|---|-------|
|  Black / White 66 | \$475 |
|---|-------|

FINISH

| | |
|--|-------|
| UltraVelour Matte Finish (white only) BVEL2 | \$850 |
|--|-------|

INTEGRATED WASTE & OVERFLOW **BOVERINI-XX**

| | |
|---|-------|
| Matte Black 19 , Satin Brass 18 | \$120 |
|---|-------|

ISLAND TUB DRAIN™**

| | |
|---|-------|
| Island Tub Drain™ BISLDD | \$260 |
| Cast Iron Island Tub Drain™ BISLDDCI | \$310 |

IF REQUIRED BY CONSTRUCTION CODE

| | |
|--|-------|
| Brass waste & overflow kit BDRCOB | \$240 |
| Brass waste kit BDRCB | \$60 |



Don't forget to specify the **finish of the integrated waste & overflow.**

* For TMU, control must be wall-mounted. Faucets must be freestanding or wall-mounted.

** An Island Tub Drain™ is required when there is **no access under the bath.**

*** When ordering an AromaFlow, an Integrated waste & overflow is mandatory (Included). Specify the finish of the waste.

FOR THE INSTALLER

SCAN
TO VIEW
INSTALLATION
VIDEO (3:20 MIN)






ESSENCIA DESIGN (FREESTANDING)



INSTALLATION

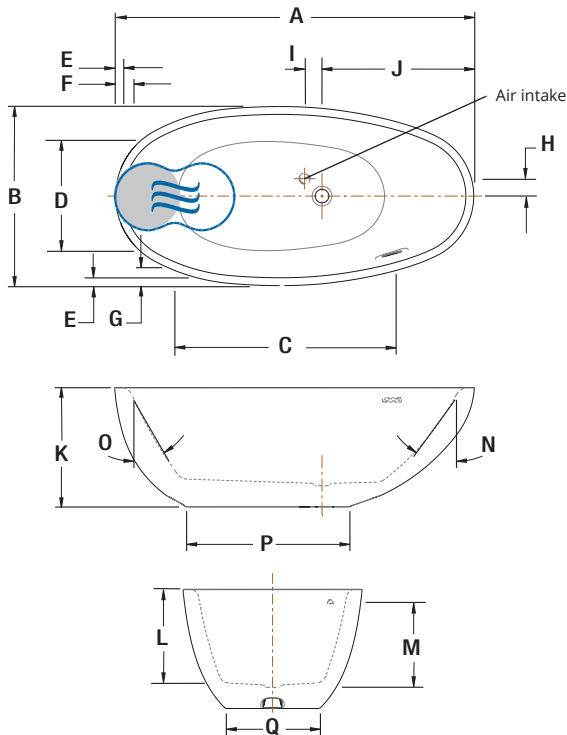

| LETTER | DESCRIPTION | MEASURE |
|--------|---|--------------------|
| A | Total length | 72" |
| B | Total width | 36" |
| C | Bathing well length (at jets height) | 44 7/8" |
| D | Bathing well width (at jets height) | 22 5/8" |
| E | Deck width (top) | 1 5/8" |
| F | Deck width (backrest round edge) | 3 1/2" |
| G | Deck width (side round edge) | 3 1/8" |
| H | Center drain to center air intake (long axis) | 3 1/2" |
| I | Center drain to center air intake (trans axis) | 3 1/2" |
| J | Center drain to deck edge | 30 1/2" |
| K | Bath height | 24" |
| L | Height from bottom of drain to top of deck | 19 1/4" |
| M | Maximum water level Maximum water level with AromaFlow | 16 3/4" 13 3/4" |
| N | Slope | 40° |
| O | Slope of backrest | 29° |
| P | Base length | 32 3/8" |
| Q | Base width | 19" |

- Indicates heated backrest (TMU)
- ☁ Indicates WarmTouchShell® position (TUB)

TECHNICAL SPECIFICATIONS

| | |
|----------------------------------|--|
| Hot water supply required | The hot water supply should be 70% or more of the bath's total water capacity. |
| Turbine | Access to the pump must be at least 18" x 22". Standard connection is 20 A, 120 V, 60 Hz, dedicated line with a Ground-Fault Circuit Interrupter (GFCI). For any additional option, a second line is needed 15 A, 120 V, 60 Hz, dedicated line with a GFCI. Air vent necessary: 2" x 4" minimum. |
| Others | <ul style="list-style-type: none"> - The Geysair® is located on the same side as the heated backrest. It must NOT be relocated. It must be connected to the hot water supply and be accessible (provide access). - Faucet must be freestanding or wall-mounted. - The turbine must be remotely installed. - TMU: Control must be wall-mounted. - The water level will be lower when an AromaFlow is installed. |

Our products must be installed by certified professionals only and according to our Owner's Manual as well as federal, provincial/state and local building codes and regulations (www.bainultra.com/dealers/dealer-documentation-and-catalog).

The specifications shown indicate the outer edge dimension and the inside bathing capacity dimension measured at air jets' height. The manufacturer accepts a 1/4" [0.64 cm] variance. There are variations on each product and specifications are subject to change as we improve upon our product as required. The dimensions needed for site preparation and structure building will differ. BainUltra® assumes no responsibility for preparatory work done prior to the product being on site.

| | |
|--------------------------------|------------|
| Cutting template | # 90000071 |
| Approx. shipping weight | 305 lb |
| Turbine power | 550 W |
| Air heater | 600 W |
| WARRANTY | |
| Controls-LED-Geysair* | 5 years |
| Bath & turbine* | 20 years |

* Some restrictions apply | www.bainultra.com/warranty