




8328 MacArthur Dr. • North Little Rock, AR 72118

501.771.4477 • Fax: 501.771.2333 Customer Service: 800.255.5766 www.jasoninternational.com

Integrity® Collection Specifications N4272 **Whirlpool & Soaking**

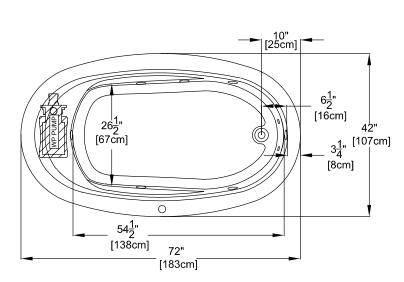



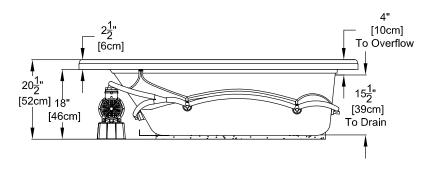

Patents received or pending. Note: Dimensional Tolerances: ±1/4"

Air Switch Control



Includes a quiet, 120v, 1HP, 1-speed pump and an air switch on/off control. Requires (1) 20A, 120v GFCI protected circuit.

Drop-in-Hole Size: See Diagram **Operating Capacity:** 52 Gal. **Overflow Capacity:** 80 Gal.

Cube:

Floor Loading / sq.ft. (WP/ Soaking): 46.4 / 44.9 lbs. Carton Wt. (WP/Soaking): 125 / 102 lbs. 43.2 ft.³

Construction: Reinforced Acrylic shell mounted on Level Form™ pre-leveled full support base.

We provide products listed with Intertek ETL SEMKO (Edison Testing Laboratories) U.S. and Canadian and with International Association of Plumbing and Mechanical Officials (IAPMO). Consult factory with your listing requirements.