# 130LTCTK PRO-FIT®1

## **MANSFIELD®**

Complete Toilet Kit, Round Front, Vitreous China, Two-Piece Toilet

### **FEATURES**

- · Complete toilet kit (CTK)
- 3-bolt SmartFasten<sup>™</sup> tank-to-bowl connection
- 1.6 gpf / 6.0 lpf low water consumption
- · Round front bowl
- · 2' flush tower
- · Anti-siphon ballcock
- 12' rough-in
- · Lined tank for reduced condensation
- · Model 40 chrome-plated, plastic trip lever
- · 2' glazed trapway
- · The Mansfield® limited lifetime warranty
- · Available in White



#### **COMPONENTS**

MODEL #	DESCRIPTION	CODES/STANDARDS		
130LTCTK	Round front, two-piece toilet kit. Includes: toilet seat, wax toilet ring, floor bolts, caps, and multi-lingual installation instructions. Water supply hardware not included.			
130	Round front, toilet bowl only. Less toilet seat.			
170	Tank and cover only with left hand, front-mount, chrome-plated, plastic trip lever. Tank liner. Less supply.	c <b>√</b> ®		
SB100	Round, closed front, plastic toilet seat and cover.			
TANK TRIM & REPLACEMENT PARTS				
40	Trip lever - chrome-plated, plastic trip lever, left hand			
211-1112	Flush tower			
08ULF-1112	Anti-siphon ballcock			
630-0030	Replacement flush valve seal			
160-LID	Tank lid			



# 130LTCTK PRO-FIT®1

## **MANSFIELD®**

Complete Toilet Kit, Round Front, Vitreous China, Two-Piece Toilet

#### **SPECIFICATIONS**


MODEL #	DESCRIPTION	CODES/STANDARDS
130LTCTK	Round front (1.6 gpf / 6.0 lpf) two-piece toilet kit.	C ®

MATERIAL	Vitreous China
WATER PRESSURE RANGE	20 to 80 PSI
FLUSH SYSTEM	2' Flush Tower
WATER USAGE	1.6 gpf / 6.0 lpf
WATER SURFACE AREA	8' X 9'
ROUGH-IN	12'
MAP RATING	800 grams

TRAP DIAMETER	2'
TRAP SEAL	2-5/8'
SHIPPING WEIGHT	Model 130LTCTK - 85 lbs. (38.2 kg)
WARRANTY	Vitreous China - Limited Lifetime Tank Trim - Limited One Year

### **TECHNICAL INFORMATION**

Note: these dimensions are nominal and subject to change without notice.

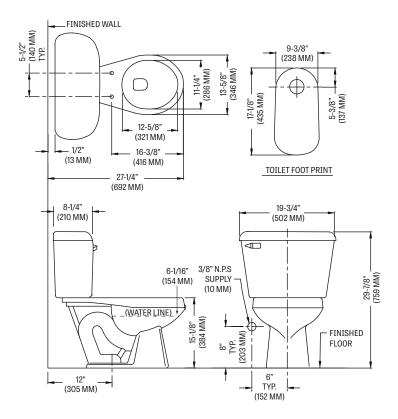



Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.