148-10-123RH **QUANTUM**®

MANSFIELD®

Elongated Front, SmartHeight™, Vitreous China, Two-Piece Toilet

FEATURES

- High performance, pressure-assist Flushmate III™ system
- 1.6 gpf / 6.0 lpf low water consumption
- Elongated front, SmartHeight[™] bowl
- 10' rough-in
- · Model 49RH chrome-plated, metal trip lever
- 2-1/8' glazed trapway
- The Mansfield® limited lifetime warranty on china, Flushmate ten-year limited warranty on vessel
- · Available in White, Biscuit and Bone



COMPONENTS

MODEL #	DESCRIPTION	CODES/STANDARDS	
148-10-123RH	Elongated front, SmartHeight™ pressure-assist, two-piece toilet. Less toilet seat and supply. Specify color.		
148-10	Elongated front, SmartHeight $^{\!\top\!$		
123RH*	Pressure-assist tank and cover only with right hand chrome-plated, metal trip lever. Less supply. Specify color.	L Wee	
TANK OPTIONS ADA COMPLIANT C ®		ADA COMPLIANT C ®	
123*	Pressure-assist tank and cover only with left hand chrome-plated, metal trip lever. Less supply. Specify color.		
122*	Pressure-assist tank and cover only with chrome-plated, plastic push button actuator. Less supply. Specify color.		
TANK TRIM & REPLACEMENT PARTS			
49RH	Trip lever - chrome-plated, metal trip lever, right hand		
125-LID	Tank lid		
FLUSHMATE® 503	Pressure-assist flushing system. Separate warranty applies. Contact FLUSHMATE® at 1-800-533-3460.		



148-10-123RH **QUANTUM**®

MANSFIELD®

Elongated Front, SmartHeight™, Vitreous China, Two-Piece Toilet

SPECIFICATIONS


MODEL #	DESCRIPTION	CODES/STANDARDS
148-10-123RH	Elongated front, SmartHeight™ (1.6 gpf / 6.0 lpf) two-piece toilet	ADA COMPLIANT C ®

MATERIAL	Vitreous China
WATER PRESSURE RANGE	35 to 80 PSI
FLUSH SYSTEM	Flushmate III™ flushing technology
WATER USAGE	1.6 gpf / 6.0 lpf
WATER SURFACE AREA	11' X 12'
ROUGH-IN	10'
MAP RATING	Pending

TRAP DIAMETER	2-1/8'
TRAP SEAL	2-5/8'
SHIPPING WEIGHT	Model 148-10 - 55 lbs. (25 kg) Model 123RH - 41 lbs. (19 kg)
WARRANTY	Vitreous China - Limited Lifetime Vessel - Limited Ten Year (Flushmate)

TECHNICAL INFORMATION

Note: these dimensions are nominal and subject to change without notice.

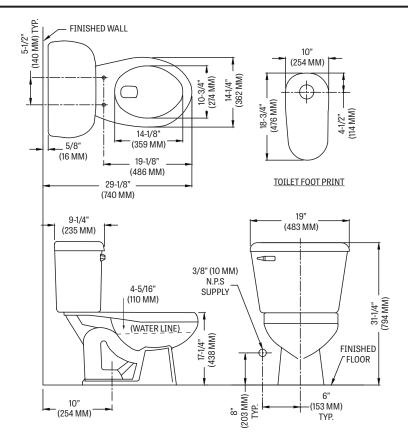

MADE IN

STANK models only

Fixture performance and specifications meet or exceed ASME A112.19.2/CSA B45.1 standards, and other state and local codes.