# 65" MALINDA FREESTANDING ACRYLIC SLIPPER

Cat. No. ATFSN67SIG-XX





L: 65-1/4" W: 28-1/4"

H: 24-1/4" and 29"

Water Depth: 17-5/8" to top of tub Water Depth: 15" to overflow Overflow slot length: 3"

Center of drain to back of rim: 12-5/8"

Bottom of drain to floor: 3-1/2" Bathing well to floor: 4-3/8"

# The following is recommended for ATFSN tubs:


- •Faucets:part #4602 or #4604
- •Rigid freestanding supplies:part #4502
- •Freestanding filler:part #7932, 7934 or 7952 (Does not Need Bath Supplies)



For easier installation we recommend use of 5598-ITD Easy Install Rough In Kit

Gallon Capacity: 55
Shipping Weight: 142 lbs.
Empty Weight: 82 lbs.
Filled Weight: 564 lbs.





(Air jet configuration if system is added, more info on page 2.)

# Features:


- ► Acrylic construction for lighter weight
- ▶ Drain and overflow covers included (available in 7 finishes)
- ► Overflow slot with integrated drain
- ► Drain included
- ► Rim measurement: 1-3/8"
- No faucet holes
- ► Angle slope of tub: 30°
- ► Includes built-in adjusters
- ► Tub is thoroughly inspected before shipment
- ▶ Option to add foam insulation between tub walls available
- ▶ New: Air jet system now available, more info on page 2

#### Finishes:

CP Polished ChromeBN Brushed NickelORB Oil Rubbed BronzePB Polished BrassPN Polished Nickel

WT White
MB Matte Black

Custom Colors Available (inside of tub is always white enamel): Painted bathtubs are considered "special order" and are not returnable \$160 Bisque or Black \$250 Designer Color

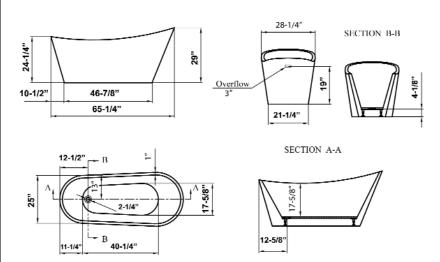

Dimensions of fixture are nominal and specifications subject to change without notice.





- A AIR JET Bottom air jets for maximum bubble action.
- B BLOWER -The heart of the massage system.
- C MANIFOLD Double back flow security prevention device.
- D FLEXIBLE PVC HOSING IAPMO certified.
- MAIN AIR INTAKE HOSE High temperature and pressure resistant.

## Air Kit is installed in tub before shipment

### **Features:**

- ▶ 750 Watt blower motor operates system
- ▶300 Watt air heater warms air
- ► System powered by 120V
- ▶ 16 brass air jets placed in bottom of tub
- ► Each air jet has 24 holes
- ► Air jet caps available in white (AIR KIT 1) or black (AIR KIT 2)
- ► Includes 1¼" x 3' main air hose plus 1¼" x 9' extension hose
- ► Automatic system purge after each use
- ► Automatic safety timer turns off system after 20 minutes
- ► Includes water tight remote control
- ➤ Compatible with most acrylic, copper and resin tubs with no feet
- ▶ Not available with cast iron tubs or tubs with feet

#### INSIDE TUB VIEW - WILL VARY BY TUB DESIGN





Remote

